


ELECTRICAL CHARACTERISTICS:
(FOR SI 9105 ISDN DC/DC EMERGENCY)

- D.C.R. : PIN 1-2 = 3 OHM MAX. PIN 3-4 = 5 OHM MAX.
PIN 6-8 = 0.10 OHM MAX.
- INDUCTANCE(@10KHZ, 0.5Vrms) : PIN 3-4 = 3.75mH±5%
- LEAKAGE INDUCTANCE(@100KHZ, 0.5Vrms, W/H PIN 1-2 SHORT):
PIN 3-4 = 80 uH MAX.
- TURN RATIO(@100KHZ, 0.5Vrms)
PIN 3-4 : 1-2 = 2.2±1%
PIN 3-4 : 6-8 = 4.29±1%
- HI-POT(@1500Vrms, 1mA, 2SEC) : PIN 1-6, 1-CORE
PIN 3-6, 3-CORE

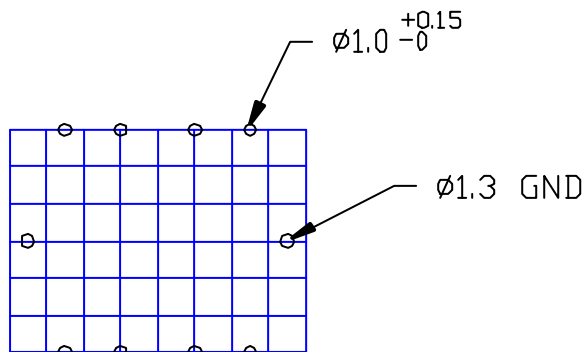

GRID 2.54*2.54

						Atech [®]		TITLE TRANSFORMER		
						Atech Technology Co., Ltd.		DWG. NO. ATS-083A		
						TEL:(02)2794-6667 FAX:(02)2794-8004				
RELEASE		PAIR	SLIEDY	UNITS	SAFETY		SHEET 1 OF 1			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M	DRAW <i>Pair</i>			
REVISIONS						DATE 07/31/97				